


Stratos SenseNET™

PC Graphical Management Software

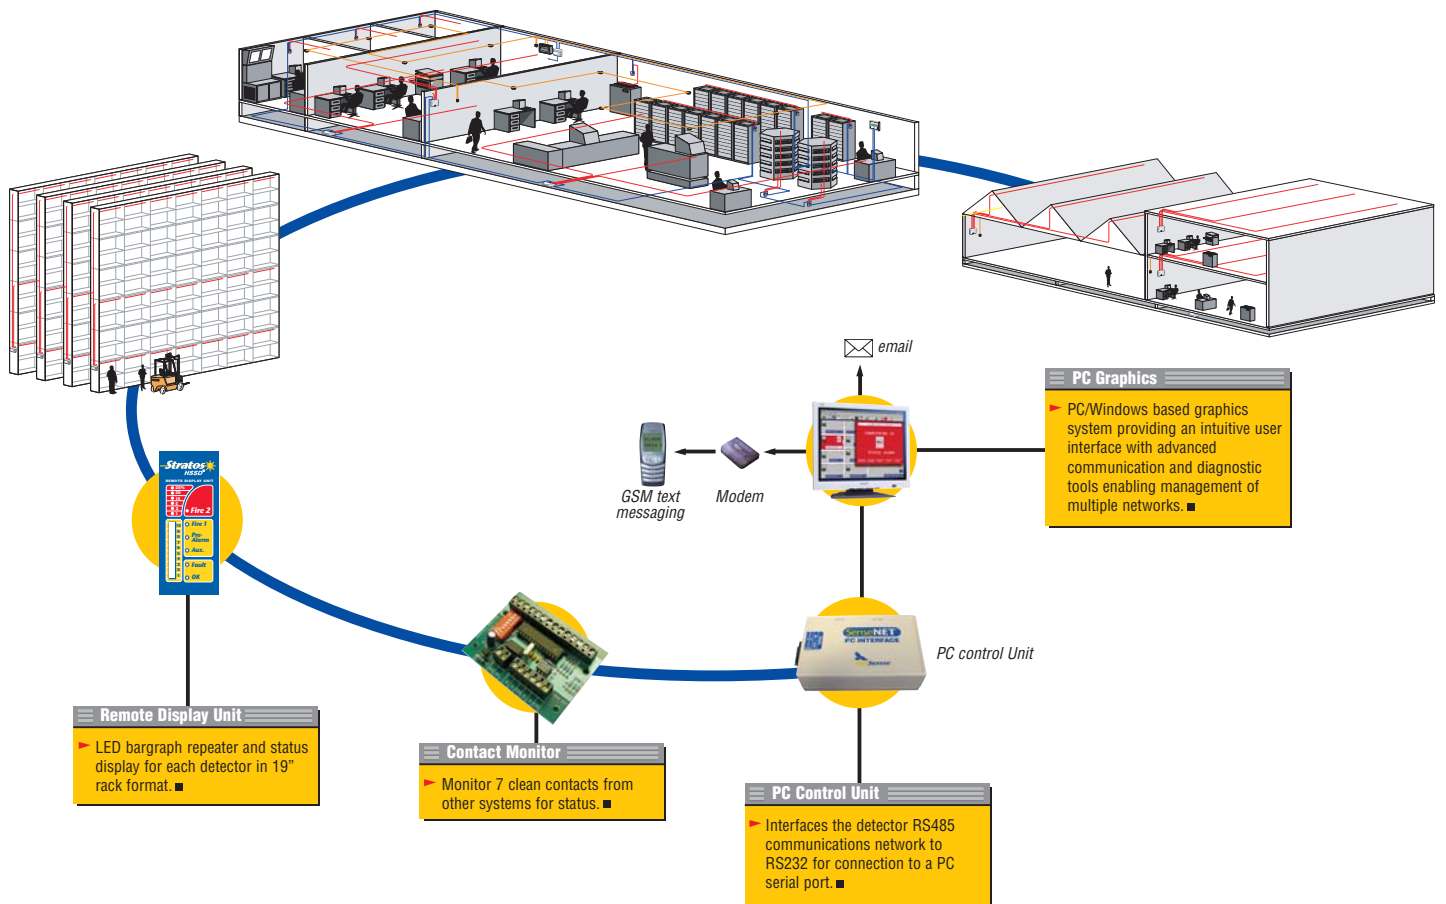


Key Features

- Manages 16 x loops of 127 detectors via Command Modules
- Manages all devices centrally
- Real-time indication of alarms /definable sound files
- User definable sound files for alarm and fault conditions
- Displays maps with specific instructions
- SiteAudit™ logs all events in real time
- SiteScan™ detects all attached devices for rapid configuration
- SiteMail™ and SitePage™ for automatic email/text alarm alerts
- 4 levels of password protected access
- Full system diagnostics
- Connectivity to other manufacturers' systems
- Global configuration changes
- Display full system status or historical information at any time

Description


- AirSense Technology have used the latest object-orientated programming technologies to create the SenseNET™ remote signalling, interrogation and set-up system. The result is a fast reliable and easy to use communications programme that has many innovative technologies integrated into its core.
- As a PC graphics system SenseNET™ is a Windows® based program that provides central management and monitoring of up to 16 loops, each of up to 127 Stratos devices. The SenseNET™ loops are highly fault tolerant and incorporate signal verification and error checking algorithms for the utmost in reliability.
- SenseNET™ integrates seamlessly with the Stratos range of detectors and allows for future developments in detection technology.
- A demonstration version is available for free download from www.airsensetechnology.com

Connection to PC via a PC Interface

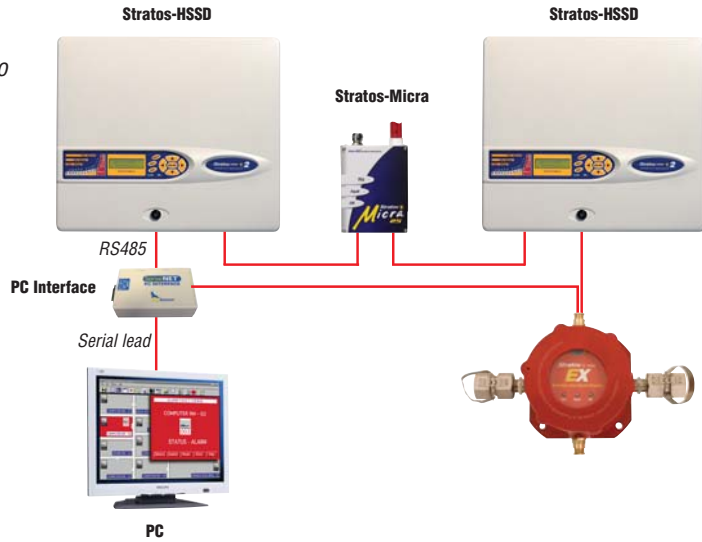

SPECIFICATION SENSENET

PC Interface supply voltage	220V - 240V
Max. bus loop length	1200m between repeater or Stratos-HSSD
Cable type	RS485 Data cable. Belden 9841 or equivalent
Max. no. of devices per loop	127
Maximum loops	16
Maximum total devices	2032

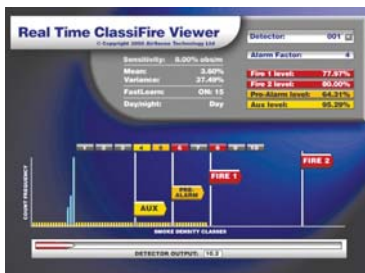


View ClassiFire® 3D in real time

Confirm correct current device operation with full diagnostics.



History List

SiteAudit™ logs all events to disk in real time. Get historical information at any time.

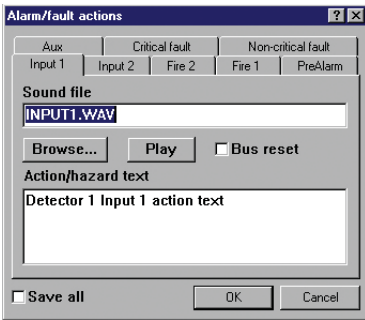

Set site maps and warnings

Display maps and instructions on alarms with definable sound files.



Paging

SitePage™ technology sends text messages to GSM telephones or pagers.



Device Settings

Streamline configuration changes by managing all devices centrally. SiteScan™ automatically detects all attached devices for rapid configuration.



Email

SiteMail™ sends email alert messages as they occur.

ORDERING INFORMATION

Part No.	Description
30804	SenseNET Control Unit – complete with power supply unit, link cables and PC software
30250	SenseNET Software CD and Dongle
Free	SenseNET demonstration software



AirSense Technology Limited

1 Caxton Place • Caxton Way • Stevenage • Herts • SG1 2UG • UK
Tel: +44(0)1438 751296 • Fax: +44(0)1438 729137
e-mail: sales@airsense.co.uk • www.airsensetechnology.com

AirSense Technology Limited (Hong Kong)

1801 Wing On Central Building • 26 Des Voeux Road Central • Central Hong Kong
Tel: (852) 2961 4206 • Fax: (852) 3007 4737
e-mail: kevin.hui@airsense.co.uk



Quality system cert. no. 404
Assessed to ISO 9001:2000